

360° direct-to-object printing  
for cylindrical items.

*UJF-3042 MkII e*  
UJF-3042 MkII e / UJF-3042 MkII EXe

UJF-6042 MkII e / UJF-7151 plusII **OPTION**



# *Kebab HS*

**Cylindrical  
objects**  
**360°**  
**Direct Printing!**  
\*Gradient angle 0 to 7.5°



(Kebab HS pictured with UJF-3042MkII e)


Up to **3x** faster production!  
360° print option  
for flat and tapered cylinders.

### Compatible printers

*UJF-3042 MkII e*  
*UJF-3042 MkII EXe*

*UJF-6042 MkII e*

*UJF-7151 plusII*

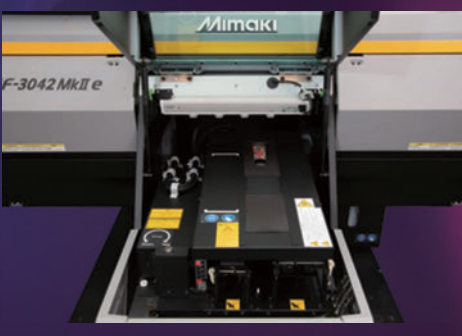

## Up to 3x\* faster productivity!

**UJF-6042MkII e + Kebab MkII L**

28 min 02 sec

**UJF-6042MkII e + Kebab HS**

9 min 17 sec

Significant time savings




\*UJF-6042MkII e, 600x1200 dpi 16 Pass, W+CMYK, 100 mm (3.9 in) diameter, 200 mm (7.9 in) length. Speed varies depending on printer and output settings.


## Compatible with cylinders up to 100 mm (3.9 in) diameter, 300 mm (11.8 in) length\*, and 7.5° taper

Kebab HS can print on objects with 50 to 100 mm (2.0 to 3.9 in) diameter & 30 to 300 mm (1.2 to 11.8 in) long\*.

It also supports tapered objects with gradient angles from 0 to 7.5°, expanding the range of your products.

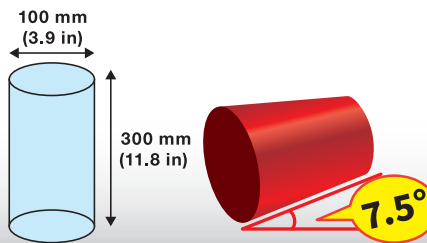

\*Up to 280 mm (11.0 in) with adaptor.




Adaptor and material setup



Dedicated adaptors (standard attachment)

### Taper warp correction added to RasterLinkTools!

RasterLinkTools is an Adobe Illustrator plug-in designed to help you prepare your print files for RasterLink. When printing on tapered materials, the print area compresses as you print from the large to smaller diameter, which can also compress your print. RasterLinkTools' Kebab tapered shape function allows you to easily correct for the image warp to keep your designs and logos in their original shape.



### RasterLink7 makes print job management simple

#### KEBAB dedicated function 1 - Print image measurement

By entering the measured outside diameter of the workpiece, the circumference and recommended print width is automatically calculated.

#### KEBAB dedicated function 2 - Image scaling function

Print image is automatically scaled according to the calculated outer circumference. No calculation and scaling is required.

Item	Kebab HS	
Item code	OPT-J0528	
Compatible printer model	UJF-3042MkII e, UJF-3042MkII EX e, UJF-6042MkII e, UJF-7151 plusII	
Rotary degree of printing material	±360 degrees or more (no limitation)	
Rotation system	Shaft rotation (the shaft fixes the material)	
Applicable objects	Cylindrical objects / Tapered media (maximum gradient angle 7.5°)*1	
Printable size	Length: 30-280 mm (1.2-11.0 in)*2 Diameter: 50-100 mm (2.0-3.9 in)	
Printable area	Feeding direction (X)	Under 300 mm (11.8 in)
	Print head moving direction (Y)	Entire circumference of an object
Maximum weight of print material	3 kg (6.6 lb) or less	
Interface	Exclusive connector	
RIP	RasterLink7	
Weight	Approx. 13 kg (28.7 lb)	
External dimensions (W x D x H)	366 mm x 536 mm x 150 mm (14.4 in x 21.1 in x 5.9 in)	

\*1 Maximum gradient angle is limited when the large diameter of the material is 86 mm or more.

\*2 In case of using adaptors (standard attachment).

• Some of the samples in this catalog are artificial renderings. • Specifications, design and dimensions stated in this catalog may be subject to change without notice (for technical improvements, etc). • The corporate names and merchandise names written on this catalog are the trademark or registered trademark of the respective corporations. • Inkjet printers print using extremely fine dots, so colors may vary slightly after replacement of the printing heads. Also note that if using multiple printer units, colors could vary slightly from one unit to other unit due to slight individual differences. • The specifications described in this catalog are as of March 2024.



### MIMAKI EUROPE BV

Stammerdijk 7E, 1112 AA Diemen, The Netherlands

www.mimakieurope.com | Tel. : +31 20 4627640

@MimakiEurope